

SPECIAL WASTE CONTAINERS TYPE SAS



SAS

	Volume in m ³	Dimensions (l x w x h) in mm	Can be stacked	Total permitted weight in kg	Weight in kg
SAS 800	0,80	1200 x 1000 x 1235	3 high	678	178


For the international transport of waste aerosols according to ADR/RID and the IMDG code, packing groups II and III

- steel construction according to DIN standard 30741, part 1
- all-round louvre vents (splash water protected)
- water-tight up to 100 mm, measured from the floor of the container
- reinforced edging
- full-length fork sleeves
- sturdy stacking corners with crane lifting eyes
- suitable for pick-up by a pallet truck, forklift or crane
- lid fastener, lockable
- spring-loaded lid with a seal
- automatic lid lock in 270° position
- lid support in 70° position

UN-APPROVALS

50A/Y/D/BAM 12806-BAUER/4000/

TRANSPORT BOX FOR AEROSOL CANS TYPE STB 1000

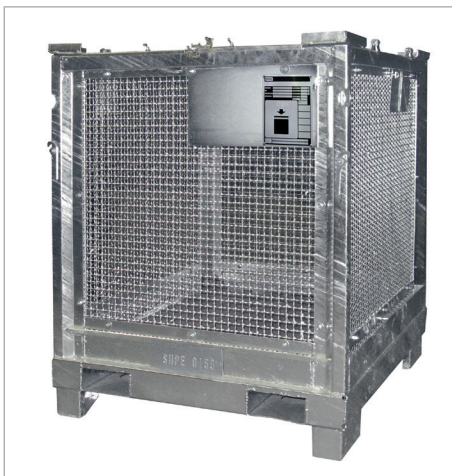

STB 1000




Can be stacked 3 high

For the international transport of aerosols according to ADR/RID and the IMDG code, packing groups II and III

- sturdy steel construction based on DIN standard 30741, part 1 with integrated sump tray, liquid-tight welding, inset, wire mesh panels (20 x 20 mm)
- galvanized lid, can be opened from both sides, with 2 lid fasteners
- lid lock in 270° position
- full-length fork sleeves
- suitable for pick-up by pallet trucks or forklifts
- fold-out plate for haz mats placards on two opposite sides
- absorbent felt is clamped to the floor using a special fixture and can easily be changed using the lever



Fold-out plate for haz mats placards

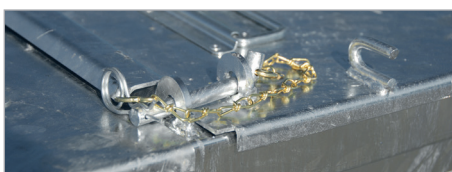

Lid lock



PE foil bag



Absorbent felt

	Volume in m ³	Dimensions (l x w x h) in mm	Can be stacked	Total permitted weight in kg	Weight in kg
STB 1000	1,0	1200 x 1000 x 1235	3 high	732	180

Accessories

- PE foil bag (needed), air permeable
- absorbent felt

UN-APPROVALS

50A/Y/D/BAM 12019-BAUER/3000/

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized