


MOBICONT TYPE M 800

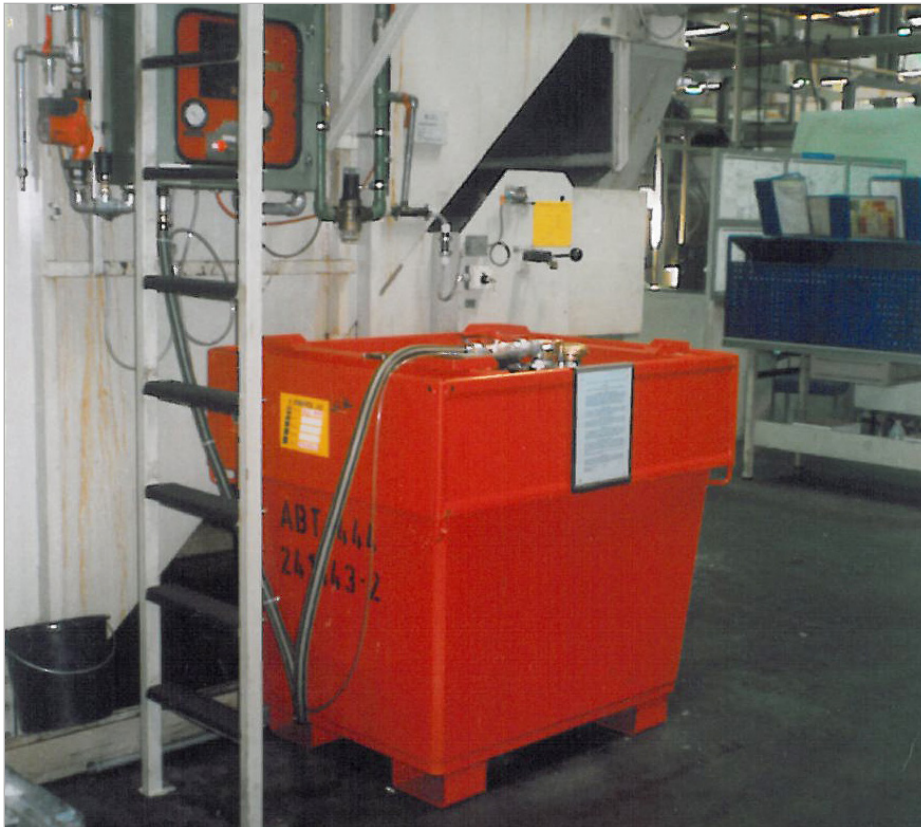


Supply and disposal of flammable liquids with a flash point > 55° C.

International transport of hazardous liquids according to ADR/RID and the IMDG code, packing groups II and III

- sturdy, conical outer container made of 3 mm steel sheet that protects inner container and provides 100% spill containment
- dipstick to test for leakage
- 100 mm ground leeway
- sturdy, changeable inner tank made of PE
- suitable for pick-up by a pallet truck, forklift or crane
- easy to clean

Accessories

- 2-part galvanized lid, with stacking corners, can be locked
- square lock or cylinder lock
- filling/extraction lid with 2 x 2", 1 x 1/2" and 1 x 3/4" thread
- 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake – construction height 225 mm
- manual or electric pumps
- level indicator
- funnel for filling
- further accessories available on request

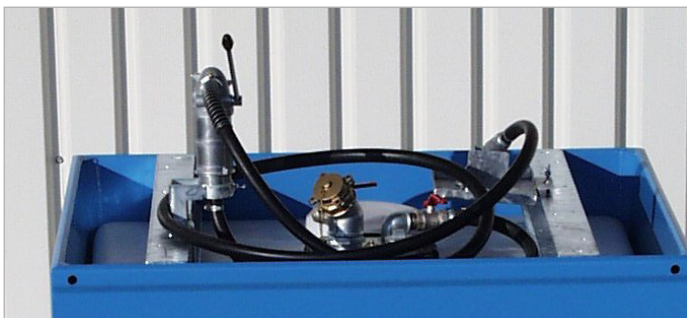


M 800 with manual pump



Filling/extraction lid



Square lock

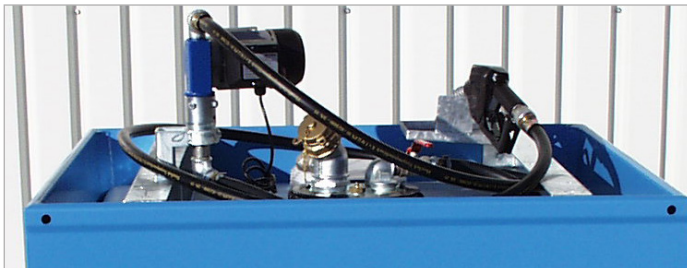

M 800 with electric pump



Funnel for filling



Mobile oil supply for machines



M 800 with lid

UN-APPROVALS

31HA1/Y/D/BAM 14263-BAUER/3344/

	Volume in l	Dimensions in mm (l x w x h)	Can be stacked	Weight painted / galv. in kg
M 800	800	1200 x 1000 x 1145	3 high	220 / 240

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized