DRUM TURNING CLAW TYPE FWZ



For lifting and transporting 60 litre or 200 litre steel bunghole drums and steel drums with a lid - in either a vertical or horizontal position

- rubber guard to prevent damage to drum (can be replaced)
- Iocking lever to secure in open position
- operating lever to adjust tilting position


	Dimensions (I x w x h) in mm	Load capacity in kg	Weight in kg paint. / galv.
FWZ 60	320x 805x 905	100	22 / 24
FWZ 200	425x1105x1350	300	58/62

DRUM CLAMP TYPE FKL



For handling 200 litre steel bunghole drums in an upright position

automatically secured

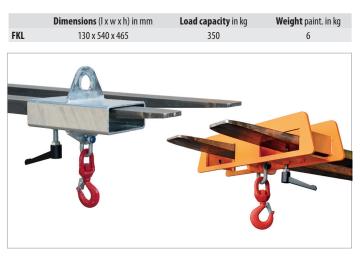

Crane Hooks (please refer to page 43) ideal to complement all drum lifting gear

SCISSOR GRIPPER TYPE LG



For handling 60 and 200 litre steel bunghole drums in a horizontal position

	Dimensions (I x w x h) in mm	Handling drum height in mm	Load capacity in kg	Weight in kg paint. / galv.
LG 60	685 x 120 x 365	450 - 600	150	4/4
LG 200	1020 x120 x 455	750 - 920	360	6/6

RAL 2000

DRUM CLAW TYPE LGZ



For handling 60 and 200 litre steel bunghole drums in an upright position

	Dimensions (I x w x h) in mm	Handling drum diameter in mm	Load capacity in kg	Weight in kg paint. / galv.
LGZ 60	555 x 150 x 325	330 - 450	150	4/4
LGZ 200	740 x 200 x 410	450 - 650	300	5/5

Finish: