

DRUM LIFTERS TYPE RS



RS-II/M



RS-I/M



RS-I/M with supporting feet for straddle stackers



RS-I/91 with hydraulic grip lock

	Max. no. of 200 l drums	Load capacity in kg	Dimensions (l x w x h) in mm	Weight in kg paint. / galv.
RS-I/M	1	800	1295 x 585 x 925	94 / 103
RS-I/91	1	800	1295 x 585 x 925	94 / 103
RS-II/M	2	1600	1185 x 940 x 925	139 / 153
RS-II/91	2	1600	1185 x 940 x 925	139 / 153

Safe and fast handling of filled drums

- sturdy steel construction
- clear line of vision for the driver
- galvanized gripping head as a standard feature
- rubber guard(s) to prevent damage to drum(s)
- gripping mechanism screwed to frame
- incredible gripping strength
- can be secured to prevent slipping

Types available

RS/M

- for filled 200 litre steel bunghole drums, steel drums with a lid, rolling hoop drums and 220 litre plastic L-ring drums


RS/91

- for filled 200 litre steel bunghole drums, steel drums with a lid, 220 litre plastic L-ring drums and plastic double L-ring drums
- with broad drum support plate

Accessories

- supporting feet for straddle stackers
- hydraulic grip lock

Individual constructions on request

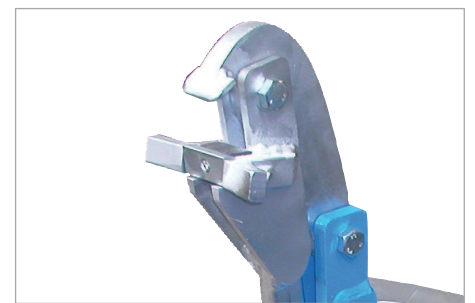

with broad drum support plate (RS/91)

	Fork sleeve inside dimensions in mm		
	A	B	C
RS-I/M	230	170	75
RS-I/91	230	170	75
RS-II/M	530	170	75
RS-II/91	530	170	75

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized