

SILO CONTAINERS TYPE SR / SG / SRE



SR




SG



SRE



Special manually operated scissor lock (SR, SG, SRE)

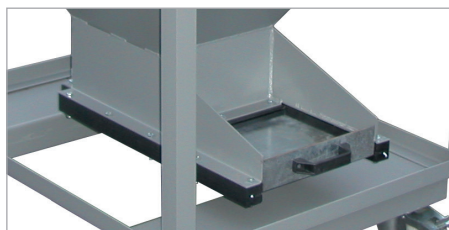

Sliding gate with a special seal on the hopper floor (SR-D, SG-D, SRE-D)



SRE-D with lid



SR-D with crane eyes

Controlled discharge of bulk solids

- special manually operated scissor lock 300 x 300 mm (SR / SG / SRE)
- frame made of steel tubing
- hopper made of steel plate with all-round edging

Types available

SR

- 2 swivel + 2 fixed polyamide castors Ø 180 mm, 1 swivel castor with brake
- construction height 225 mm

SG

- fork sleeves
- stacking corners

SRE

- 2 swivel + 2 fixed polyamide castors Ø 180 mm, 1 swivel castor with brake
- construction height 225 mm
- fork sleeves

SR-D, SG-D, SRE-D

- design as above but with a sliding gate and a special seal on the hopper floor, for manual use, opening 300x300 mm, primarily for fine-grained bulk materials

Accessories

- galvanized lid, removable
- crane eyes

Individual constructions on request

	Volume (approx.) in l	Dimensions (l x w x h) in mm	Weight in kg	
			paint	galvanized
SR / SR-D 375	375	1115 x 780 x 1230	92 / 109	99 / 119
SRE / SRE-D 375	375	1115 x 780 x 1300	102 / 123	110 / 135
SG / SG-D 375	375	1090 x 860 x 1170	102 / 116	110 / 127
SR / SR-D 600	600	1115 x 780 x 1610	116 / 135	125 / 148
SRE / SRE-D 600	600	1115 x 780 x 1680	128 / 151	138 / 165
SG / SG-D 600	600	1090 x 860 x 1550	128 / 143	137 / 157

