

# BARROW TIPPERS TYPE KW-ET / SKW-ET



KW-ET

For all kinds of bulk goods, is emptied at ground level

- sturdy steel sheet construction with reinforced edging
- frame made of steel tubing
- fork sleeves can be secured to prevent slipping and unintentional emptying
- welding, oil and watertight
- 2 wheels + 1 swivel castor (as of volume 600 litres upwards + 2 swivel castors) made of solid rubber Ø 250 mm, one swivel castor with brake
- handle

## Types available

### Barrow Tipper KW-ET

- as above



KW-ET with lid



SKW-ET

### Swarf Barrow Tipper SKW-ET

- with perforated sieve and 1" drain-cock designed to separate liquids from solids and drain them



Perforated corner sieve



1" drain-cock

## Accessories

- galvanized lid, can be opened from both sides




SKW-ET



SKW-ET

	Volume approx. in l	Dimensions (l x w x h) in mm	Height dumping edge in mm	Load capacity in kg	Weight in kg paint./galv.
<b>KW-ET 250</b>	250	1115 x 820 x 990	680	300	75 / 81
<b>KW-ET 400</b>	400	1320 x 900 x 1090	740	300	91 / 98
<b>KW-ET 600</b>	600	1395 x 1070 x 1220	830	300	139 / 150
<b>KW-ET 1000</b>	1000	1420 x 1340 x 1290	870	300	164 / 177
<b>SKW-ET 250</b>	250	1115 x 820 x 990	680	300	77 / 83
<b>SKW-ET 400</b>	400	1320 x 900 x 1090	740	300	93 / 101
<b>SKW-ET 600</b>	600	1395 x 1070 x 1220	830	300	141 / 152
<b>SKW ET 1000</b>	1000	1420 x 1340 x 1290	870	300	167 / 180

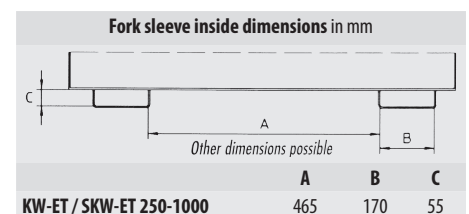

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

RAL 7021

hot-dip galvanized