



SUSPENDED SUMPS WITH PE INLAY **TYPE EHW PE**

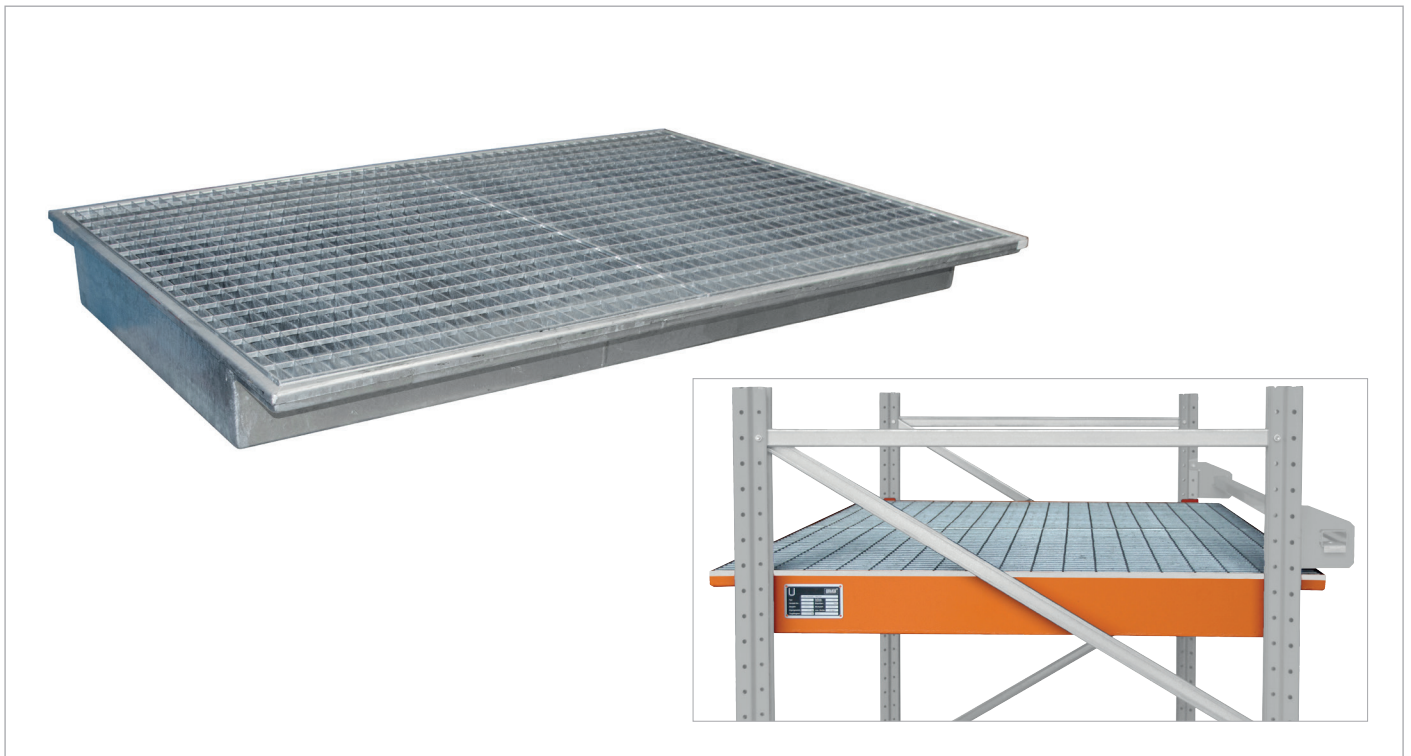

EHW 2200 PE

EHW PE in the shelving system

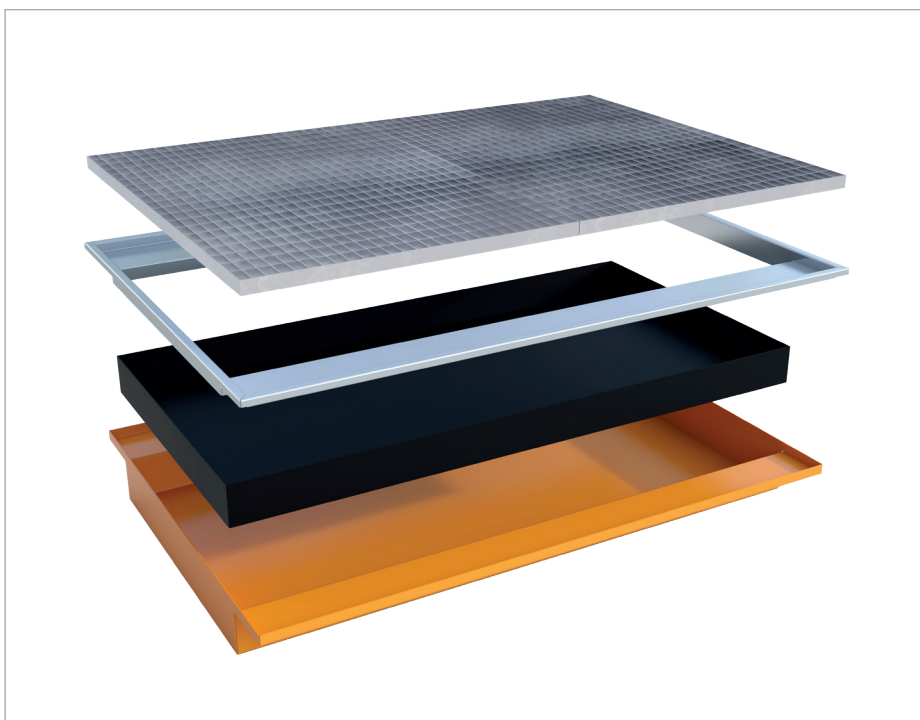

EHW 1800 PE (presentation of the individual components)

Integrate suspended sumps into existing shelving systems – a cost-effective and efficient way of bringing them up to standard and ensuring they meet the legal requirements

- construction made of 3 mm steel sheet
- PE inlay
- galvanized fixing frame
- galvanized grid (load capacity 1000 kg/m²)

Individual construction on request

	for Cross Beam length in mm	Dimensions in mm (l x p x h)	Retention capacity in l	Weight in kg paint. / galv.
EHW 1800 PE	1800	1765 x 1265/915 x 165	173	139 / 145
EHW 2200 PE	2200	2165 x 1250/915 x 145	175	165 / 172
EHW 2700 PE	2700	2665 x 1265/915 x 135	200	198 / 206
EHW 3300 PE	3300	3265 x 1265/915 x 115	175	241 / 250



- every unit tested for leakage
- flammable liquids, GHS categories 1 - 3
- hazardous to aquatic environment, GHS categories 1 - 4

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized