

## MOBILE SUMP TRAYS TYPE AW 60 SR



AW 60-1 SR



AW 60-1 SRF

|             | Max. no. of drums<br>no. x litre | Dimensions<br>(l x w x h) in mm<br>incl. handle | Dim. tray only<br>(l x w x h) in mm | Retention capacity<br>in l | Weight in kg<br>paint. / galv. |
|-------------|----------------------------------|---|-------------------------------------|----------------------------|--------------------------------|
| AW 60-1 SR  | 2 x 60                           | 940 x 500 x 1075                                | 800 x 500 x 415                     | 72                         | 39 / 42                        |
| AW 60-1 SRF | 1 x 60                           | 940 x 500 x 1075                                | 800 x 500 x 415                     | 72                         | 49 / 52                        |

### Mobile storage of 60 litre drums

- construction made of 3 mm steel sheet
- galvanized grid (load capacity 1000 kg/m<sup>2</sup>)
- 2 swivel + 2 fixed polyamide castors Ø 100 mm, one swivel castor with brake – construction height 125 mm, handle

### Types available

#### AW 60-1 SR

- storage of max. 2 x 60 litre drums in an upright position

#### AW 60-1 SRF

- storage of 1 x 60 litre drum in a horizontal position
- drum Support FA 60-1, galvanized, for 60 l drums, for horizontal storage and filling, kit form

## MOBILE SUMP TRAYS WITH PERFORATED PANEL TYPE LPW 60




LPW 60-3

### Dispense oils etc. from 60 litre drums, wherever necessary - mobile, safe, simple

- 3 mm steel sheet sump tray
- galvanized grid (load capacity 1000 kg/m<sup>2</sup>)
- sturdy rear panel, perforated, galvanized steel sheet with 10 x 10 mm square holes, straight row pattern, 38 mm spacing allows tool holders to be positioned as required
- hot-dip galvanized handles
- set of polyamide castors: 2 fixed and 2 swivel, (1 swivel castor with a brake) Ø 100 mm, construction height 125 mm

### Accessories

- galvanized tool deposit
- galvanized drip tray with fixture to hook up pump nozzle

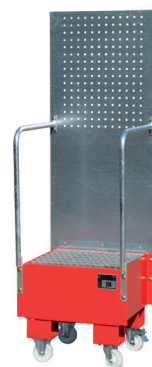

LPW 60-1



LPW 60-2

Valid for all products on this page:



- every unit tested for leakage
- flammable liquids, GHS categories 1 - 3
- hazardous to aquatic environment, GHS categories 1 - 4

|          | Max. no. of drums x l | Dimensions<br>(l x w x h) in mm | Retention capacity<br>in l | Weight<br>paint. / galv. in kg |
|----------|-----------------------|---------------------------------|----------------------------|--------------------------------|
| LPW 60-1 | 1x 60                 | 570 x 590 x 1775                | 67                         | 52 / 54                        |
| LPW 60-2 | 2x 60                 | 570 x 890 x 1685                | 73                         | 64 / 66                        |
| LPW 60-3 | 2x 60                 | 875 x 500 x 1685                | 73                         | 56 / 58                        |

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized