


MINI LIFTING BEAMS TYPE TM



Designed to move loads, workpieces or machine parts by crane – fast, no load sway.

Non-fixed load lifting attachment, DIN EN 13155 compliant.

- lifting beam with crane lifting eye
- 2 rotating swivel hooks
- adjustment holes; variable hook position
- support legs in compliance with the German Use of Work Equipment Directive ("DGUV") 100-500, Chapter 2.8

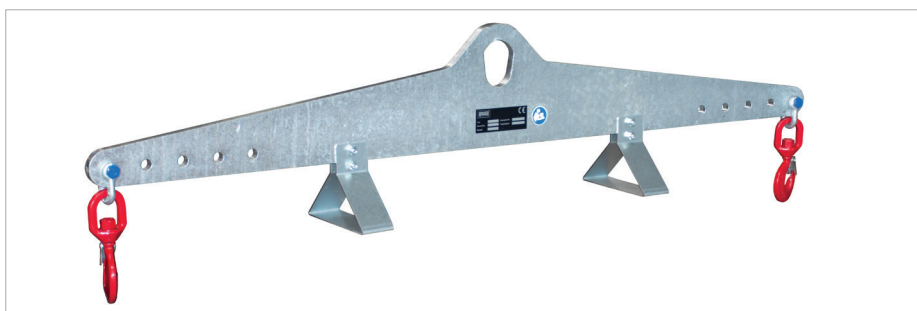

	Spacing between hooks min.-max. (mm)	Load capacity (kg)	Dimensions (l x w x h) (mm)	Weight (kg)
TM 200- 500	200 - 500	500	550 x 100 x 305	6
TM 400- 800	400 - 800	500	850 x 100 x 305	8
TM 800-1200	800 -1200	800	1250 x 160 x 340	17

Finish:

hot-dip galvanized