

# DUO-CONTAINER TYPE DC




DC 1000

**For the international transport of hazardous liquids according to ADR/RID and the IMDG code, packing groups II and III**

- according to DIN standard 30741, part 2
- comprised of an inner and an outer container
- no sump tray required
- fill hole Ø 457 mm with lockable dome cover
- pressure relief valve 3/4", 0.5 bar
- 2 x 2" coupling with plug
- dipstick to register any leakage
- folding step
- suitable for pick-up by a pallet truck, forklift or crane
- max. density 1.8 kg/l
- collection and storage both indoors and outdoors
- funnel
- DC 450 can also be used as collecting container for flammable liquids of the GHS categories 1-3

## Accessories

- funnel with stainless steel sieve
- embossed company name
- wing nut wrench

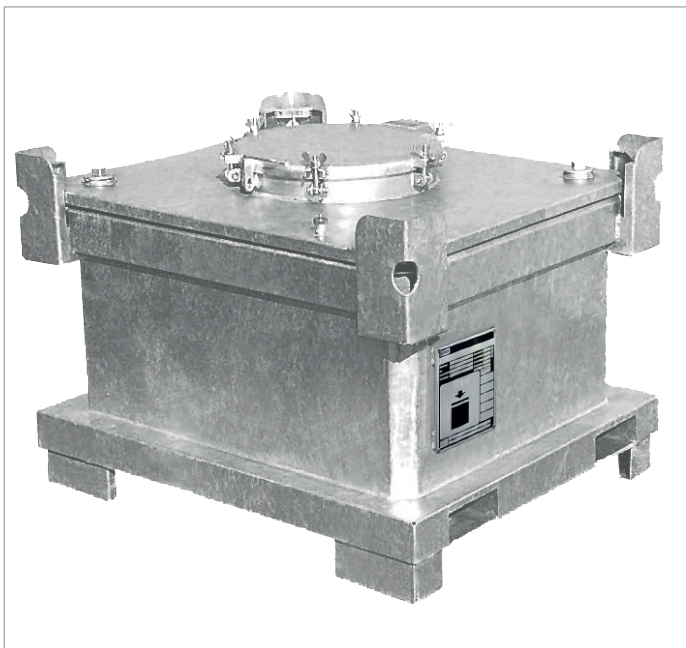

DC 450



Funnel with stainless steel sieve



Wing nut wrench

## UN-APPROVALS

- Ⓢ 31A/Y/D/BAM 12672-BAUER/10200/
- Ⓢ 31A/Y/D/BAM 12673-BAUER/10200/

	Volume in l	Dimensions (l x w x h) in mm	Can be stacked	Total permitted weight in kg	Weight in kg
DC 450	450	1200 x 1000 x 900	3 high	1100	290
DC 1000	1000	1200 x 1000 x 1580	3 high	2230	430

Finish:

hot-dip galvanized