



DRUM TIPPER TYPE FD

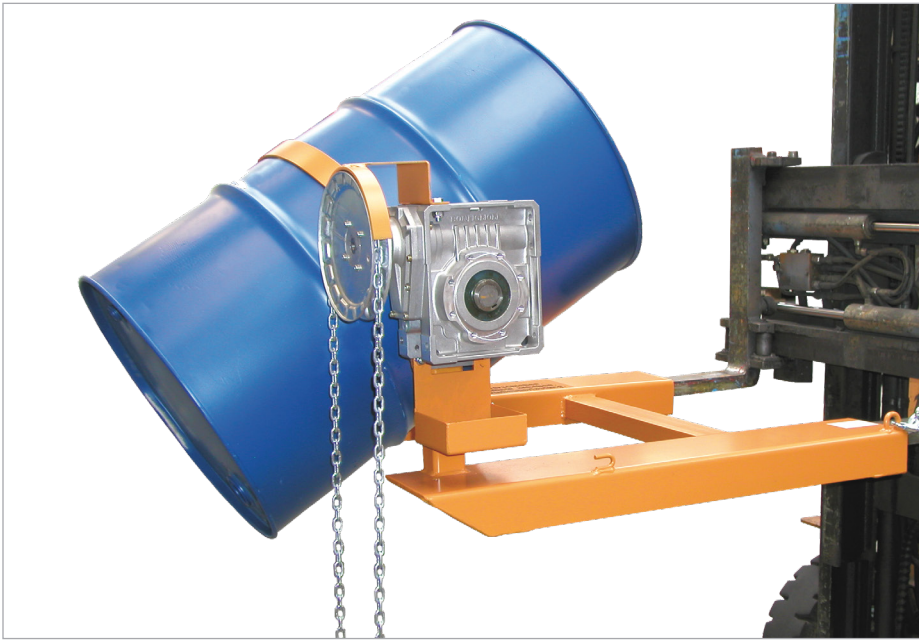

FD-K

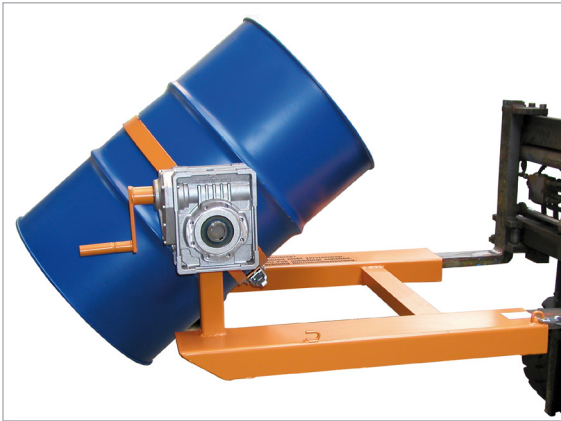

FD-HK



FD-SK

Pick-up, transport and controlled emptying of 200 litre steel bunghole drums and steel drums with a lid

- sturdy frame
- self-braking gear box
- drum cradle with eccentric lock
- can be secured to prevent slipping

Types available

FD-K

- tipping process by loop chain
- suitable for pick-up by a forklift truck

FD-HK

- tipping process by crank handle
- suitable for pick-up by a forklift truck

FD-H

- tipping process by lifting cylinder
- suitable for pick-up by a forklift truck

FD-SK

- tipping process by loop chain
- suitable for pick-up by a forklift truck or crane



FD-H

	Dimensions in mm (l x w x h)	Tipping process by	Drum (Ø) in mm	Load capacity in kg	Range of rotation in degrees	Weight in kg (painted/galv.)
FD-K	1245 x 1100 x 610	loop chain	590	360	360	76 / 84
FD-HK	1245 x 1000 x 540	crank handle	590	360	360	72 / 78
FD-H	1245 x 1000 x 475	lifting cylinder	590	360	180	75 / 83
FD-SK	650 x 1020 x 1010	loop chain	590	360	360	79 / 85

	Fork sleeve inside dimensions in mm		
	A	B	C
FD-K / -HK / -H	650	170	75
FD-SK	530	200	85
FD/L-K and -HK	530	170	75

DRUM TIPPER TYPE FD/L



FD/L-HK

	Dimensions in mm (l x w x h)	Tipping process by	Drum (Ø) in mm	Load capacity in kg	Range of rotation in degrees	Weight in kg (painted/galv.)
FD/L-K	1940 x 1140 x 890	loop chain	490-590	360	270	141 / 155
FD/L-HK	1940 x 1095 x 890	crank handle	490-590	360	270	135 / 149

How to pick up and empty steel bunghole drums, steel drums with a lid, rolling hoop drums, plastic L-ring drums, plastic double L-ring drums and plastic drums with a lid ranging from 110 to 220 litres

- similar to the FD, but with rotating drum cradle
- suitable for pick-up by a forklift truck

Types available

FD/L-K

- tipping process by loop chain

FD/L-HK

- tipping process by crank handle

Fork sleeve inside dimensions
refer to table FD

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized