

SHUNTING AID TYPE RH



A shunting aid makes light work of manoeuvring trailers on company premises, for example on the shop floor

- sturdy fork sleeves for pick-up by a forklift truck
- safety feature to prevent slipping
- easy to connect

Types available

RH

- coupling ball

RH-RM

- with trailer coupling Rockinger RO 805 B with bolt Ø 31,5 mm

RH-RMK

- similar to type RH-RM, but with coupling ball


RH-RA

- with automatic trailer coupling Rockinger RO 244-2 with bolt Ø 25 mm


RH-RAK

- similar to type RH-RA, but with coupling ball

RH

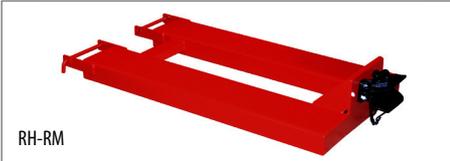

RH-RM

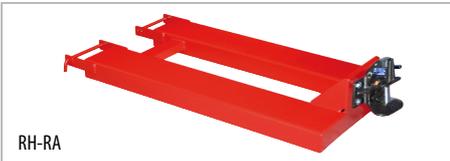

RH-RA



RH-RMK



RH-RAK

	Dimensions (l x w x h) in mm	Length of fork sleeves in mm	Fork sleeves inside dim. (w x h) in mm	Distance between fork sleeves in mm	max. load capacity in kg		Weight in kg
					coupling ball	trailer coupling	
RH	405 x 550 x 170	405	168 x 68	200	100	-	24
RH-RM	1455 x 685 x 245	1200	200 x 80	200	-	650	72
RH-RMK	1525 x 685 x 340	1200	200 x 80	200	100	650	77
RH-RA	1450 x 685 x 280	1200	200 x 80	200	-	250	72
RH-RAK	1505 x 685 x 340	1200	200 x 80	200	100	250	77


LOADING SUPPORT TYPE VS



Loading support to facilitate loading and unloading articulated trucks up to 25 tonnes

- sturdy steel construction with one fork sleeve
- can easily be picked up and positioned accurately - no need for the operator to leave his seat
- high stability thanks to the relatively wide construction which has 4 feet under the base
- inclined anti-slip contact surface compensates different heights of trailers and prevents the trailer from tipping over or rolling away

Fork sleeve inside dimensions in mm

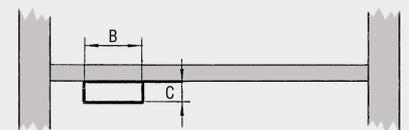

	B	C
VS	180	60

	Dimensions (l x w x h) in mm	Load capacity in kg	Weight in kg
VS	1600 x 1200 x 950-1200	15000	170

Finish:

RAL 3000