

SWARF TILTING CONTAINERS TYPE EXPO®-E



Swarf Container with rolling mechanisms


- perforated sieve and 1" drain-cock designed to separate liquids from solids and drain them
- welding, oil and watertight
- optimised load centre
- can be emptied at any height by cable operated from the driver's seat
- body with all-round reinforced edging
- sturdy frame with fork sleeves
- can be secured to prevent slipping and unintentional emptying
- wheels can be fitted later

Accessories

- EXPO-E 150-275: 2 swivel + 2 fixed polyamide castors Ø 100 mm, one swivel castor with brake - construction height 125 mm
- EXPO-E 300-2100: 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake - construction height 225 mm
- galvanized lid, can be opened from both sides
- trailer coupling and towing bar



EXPO-E with castors

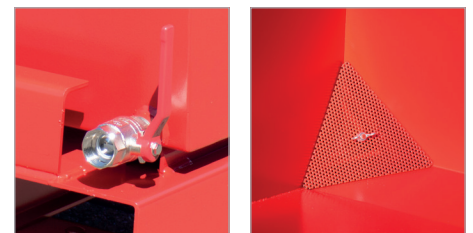

1" drain-cock

Perforated corner sieve



EXPO-E with lid



	Volume (approx.) in m ³	Dimensions (l x w x h) in mm	Load capacity in kg	Weight in kg paint. / galv.
EXPO-E 150	0,15	960 x 640 x 540	750	72 / 78
EXPO-E 225	0,225	960 x 925 x 540	750	80 / 86
EXPO-E 275	0,275	960 x 1210 x 540	750	88 / 95
EXPO-E 300	0,30	1260 x 770 x 835	750	114 / 123
EXPO-E 600	0,60	1260 x 1070 x 835	1000	133 / 143
EXPO-E 900	0,90	1260 x 1570 x 835	1000	167 / 180
EXPO-E 1200	1,20	1720 x 1070 x 1095	1500	202 / 218
EXPO-E 1700	1,70	1720 x 1570 x 1095	1500	232 / 250
EXPO-E 2100	2,10	1720 x 1870 x 1095	1500	254 / 274

	Fork sleeve inside dimensions in mm		
	A	B	C
EXPO-E 150-275	170	200	80
EXPO-E 300	300	200	80
EXPO-E 600-2100	600	200	80

Finish:	RAL 2000	RAL 3000	RAL 5012	RAL 6011	RAL 7005	hot-dip galvanized
---------	----------	----------	----------	----------	----------	--------------------