

SUMP TRAYS WITH PE INLAY TYPE AW/PE



Storage of max. 4 x 200 litre drums or 2 x 1000 litre containers (IBCs) containing aggressive substances or 200 l drums or an IBC in combination with 60 litre drums and/or canisters and small cans

- construction made of 3 mm steel sheet
- 100 mm ground leeway
- PE inlay
- fixing frame
- galvanized grid (load capacity 1000 kg/m²)

Individual construction on request

AW-1/PE




AW-1/PE



AW 1000-2/PE



AW 1000/PE

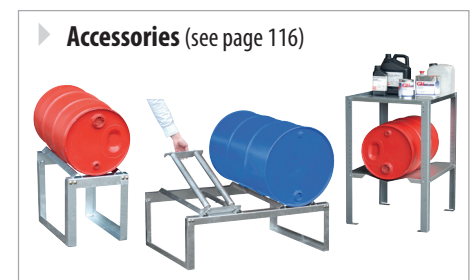

	Max. no. of 200 litre drums/1000 litre IBCs	Dimensions in mm (l x w x h)	Retention capacity in l	Weight in kg paint. / galv.
AW-1/PE	1 / -	815 x 815 x 470	208	73 / 77
AW-2/PE	2 / -	1215 x 815 x 365	226	89 / 93
AW-4/A/PE	4 / -	1215 x 1215 x 290	240	113 / 120
AW-4/B/PE	4 / -	2415 x 815 x 255	254	141 / 152
AW 1000/PE	- / 1	1475 x 1475 x 630	1053	211 / 227
AW 1000-2/PE	- / 2	2665 x 1315 x 440	1084	261 / 272

- every unit tested for leakage
- flammable liquids, GHS categories 1 - 3
- hazardous to aquatic environment, GHS categories 1 - 4